



HiPower LED Highbay Light

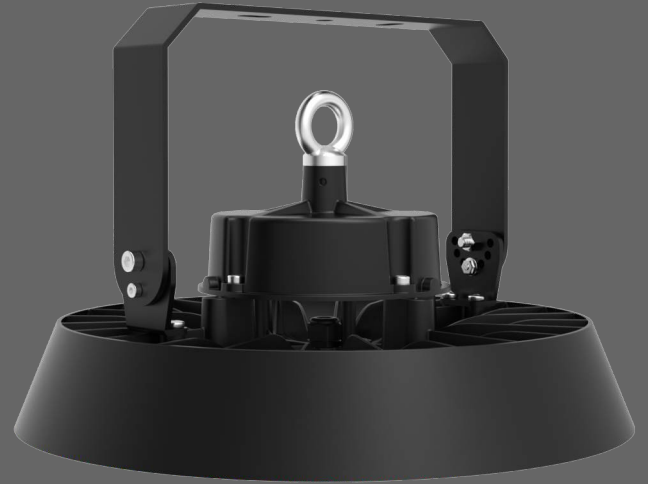

Up to 500W
Up to 210LM/W

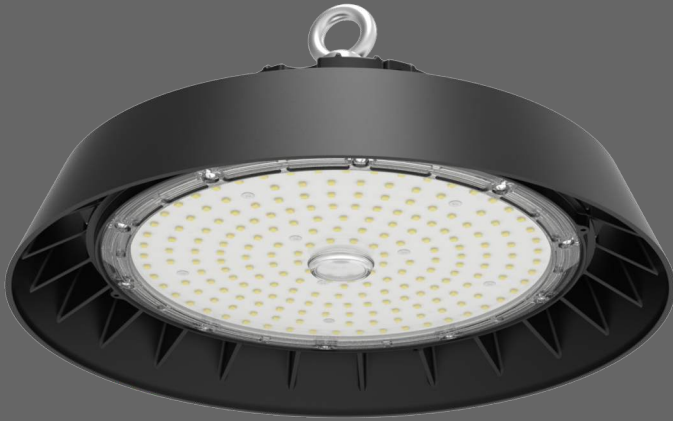

CE RoHS IP65 IK09

Features:

- Complete power, wide coverage of wattage
- Wattage from 60W to 500W optional
- Complete power, wide coverage of wattage
- Power Selectable (Optional)
- High energy savings compared to systems with traditional discharge lamps
- Light-on-demand feature with optional motion sensor
- Robust design
- Emergency lighting with optional battery
- High visual comfort
- No hazardous materials
- Fast ROI thanks to long life span and reduced maintenance
- Compact housing optimised for heat dissipation and reduced dust accumulation
- Dedicated range of mounting accessories



HiPower LED Highbay Light Specification



Hipower LED Highbay Light

Technical Data


| Model No. | HIHB-100 | HIHB-150 | HIHB-200 | HIHB-240 | HIHB-300 | HIHB-400 | HIHB-500 |
|-----------------------|---|------------|------------|------------|------------|------------|------------|
| Norminal Wattage | 100W | 150W | 200W | 240W | 300W | 400W | 500W |
| Dimension(mm) | φ260*162mm | φ310*169mm | φ350*177mm | φ350*177mm | φ400*197mm | φ400*197mm | φ490*231mm |
| Weights | 1.9kg | 2.4kg | 2.9kg | 2.9kg | 4.9kg | 8.5kg | 8.5kg |
| Input Voltage AC | AC120-277V 50/60Hz | | | | | | |
| LED Brand | SMD 2835/5057 LED | | | | | | |
| Dimming Control | 1-10V | | | | | | |
| Driver Type | Constant current(CC) | | | | | | |
| Operating Temperature | -30 to +50°C | | | | | | |
| Power Factor(PF) | 0.9 | | | | | | |
| THD | Constant current(CC)<20% | | | | | | |
| Safety features | Open circuit protection, Short circuit protection, Overvoltage protection | | | | | | |
| Luminarie Efficiency | 160lm/w, 170lm/w, 195lm/w, 210lm/w | | | | | | |
| Beam Angle | 60°/90°/120° | | | | | | |
| CRI | CRI>70 standard, CRI>80 optional | | | | | | |
| CCT | 4000K/5000K/5700K/6500K | | | | | | |
| Rating | IP65 IK09 | | | | | | |
| Material | Aluminium+PC | | | | | | |
| Installation | Loop Hanging Bracket Mounting | | | | | | |
| Warranty | 5 years | | | | | | |
| Standard colour(s) | Black Spary (RAL9004) | | | | | | |
| Lifetime | L70B10 >100,000h L80B10>50,000h | | | | | | |
| Certifications | CE, RoHS | | | | | | |

Hipower LED Highbay Light


Optional



Accessories



Light Distributions

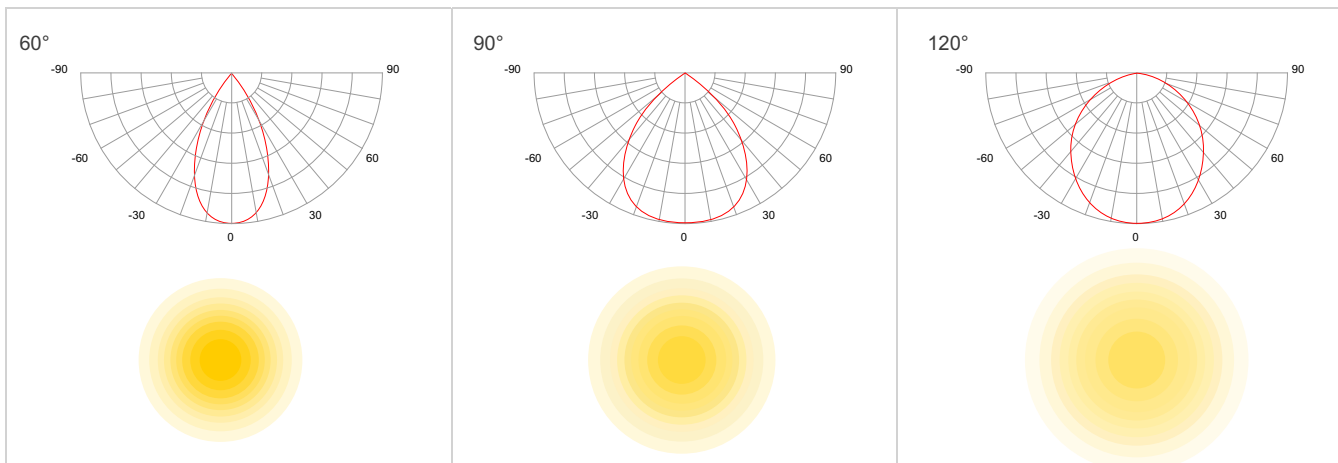


Hipower LED Highbay Light


Packaging

| Model No | PACKAGE SIZE | QTY/CTN | NET WEIGHT | GROSS WEIGHT | 20GP | 40HQ |
|----------|------------------|----------|------------|--------------|---------|---------|
| HIHB-100 | L300*W300*H160mm | 1PCS/CTN | 1.9kg | 2.4kg | 1800pcs | 4550pcs |
| HIHB-150 | L350*W350*H165mm | 1PCS/CTN | 2.4kg | 3.0kg | 1250pcs | 3250pcs |
| HIHB-200 | L390*W390*H170mm | 1PCS/CTN | 2.9kg | 3.7kg | 1000pcs | 2550pcs |
| HIHB-240 | L390*W390*H170mm | 1PCS/CTN | 2.9kg | 3.7kg | 1000pcs | 2550pcs |
| HIHB-300 | L470*W470*H210mm | 1PCS/CTN | 4.9kg | 6.0kg | 592pcs | 1423pcs |
| HIHB-400 | L590*W590*H225mm | 1PCS/CTN | 8.5kg | 10.0kg | 342pcs | 779pcs |
| HIHB-500 | L590*W590*H225mm | 1PCS/CTN | 8.5kg | 10.0kg | 342pcs | 779pcs |


1895^{PCS}
100W/20GP




4638^{PCS}
100W/40HQ




1368^{PCS}
150W/20GP




3229^{PCS}
150W/40HQ




1111^{PCS}
200W/20GP




2565^{PCS}
200W/40HQ




1111^{PCS}
240W/20GP




2565^{PCS}
240W/40HQ



592^{PCS}
300W/20GP





1423^{PCS}
300W/40HQ




Hipower LED Highbay Light

Dimension

100W





Universal Reflector

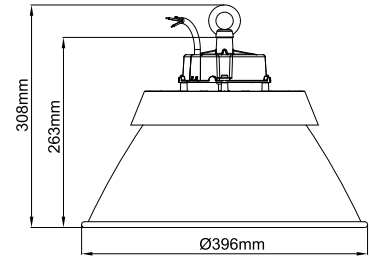


Tall Reflector

150W





Universal Reflector

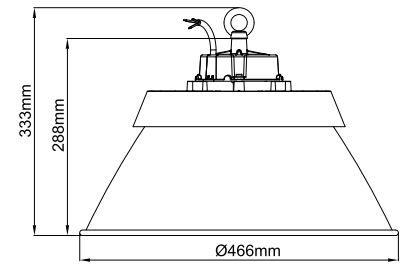


Tall Reflector

200W/240W

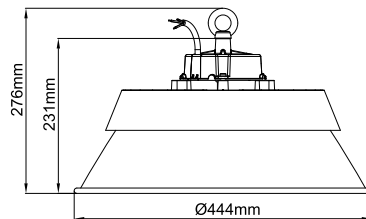



Universal Reflector

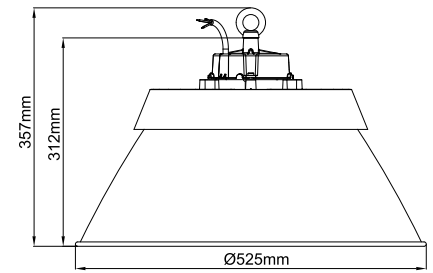


Tall Reflector

300W/400W/500W



Universal Reflector

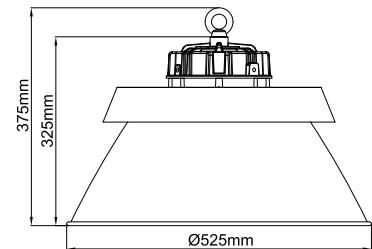

Tall Reflector